



**powerstation hub  
& global powerstation hub**

---

**USER MANUAL**

## **Welcome**

Thank you for purchasing the mophie® powerstation® hub portable battery hub. Your powerstation hub is a compact yet powerful mobile charging solution for your Qi-enabled devices, smartphones, tablets, and other USB devices. Now you will be able to travel great distances and be the master of your own destiny, no longer bound by the limitations of your device's internal battery!

## **Package Contains**

- powerstation hub portable battery hub
- AC Adapters: North America, United Kingdom\*, Europe\*, Australia\*, China\*
- Travel Cap\*
- Quick-start guide

\*Interchangeable AC adapters and Travel Cap included only in international version.

## **Features**

Here's a rundown of why your powerstation hub portable battery hub is so great:

- Universal wireless charging: Wirelessly charges any Qi-enabled smartphone.
- Charges up to four devices at the same time (one wireless and three wired via USB ports).
- USB-C PD input/output port can fast charge at up to 18W.

- High-output USB-A QC port charges devices at up to 15W.
- AC charging input with interchangeable AC adapters\*.
- Built-in 6,000mAh battery keeps your devices charged throughout the day.
- Ultra-portable design makes it easy to carry the powerstation hub just about anywhere.
- Priority+<sup>®</sup> charging provides power to charging devices first before the powerstation hub battery starts to recharge.
- Rubberized, non-slip wireless charging surface keeps your Qi-enabled device in place while charging.
- Track battery power at a glance with the integrated four-light LED status indicator. You can keep tabs on charging status and current battery life. Know before you go!
- mophie's smart adaptive charging technology identifies your connected device and always delivers the fastest, most efficient charging speeds available.
- Digital Power Management circuitry provides built-in short-circuit, overcharge and temperature protection. Safety first!

## **Compatibility**

The mophie powerstation hub portable battery hub is compatible with most popular smartphones, tablets, USB devices and wearables, and will wirelessly charge Qi-enabled smartphones.

- If you experience any issues with charging your device, ensure that the powerstation hub battery is fully charged, and check the FAQ section on this website.


No matter what device you have, carefully read through the *Warning* section in this manual and in the quick-start guide included with your battery hub before using it.

## Charging Your powerstation hub Battery

**IMPORTANT:** Before using your powerstation hub for the first time, fully charge it (so that pressing the charge status button lights all four status LEDs).

### AC Charging


1

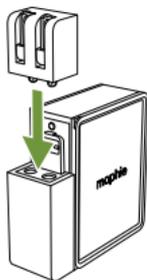


2 (NA & China-only)



3

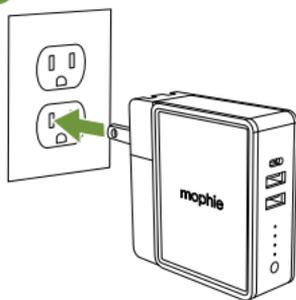

4

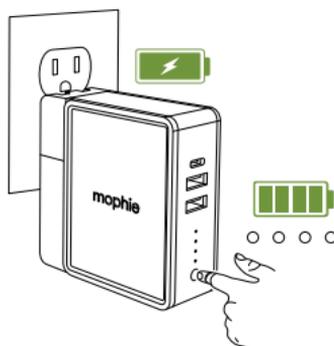


1. Attach the AC adapter for your region.
2. (NA and China only) Unfold the power prongs so they lock in the open position.
3. Insert the AC power prongs into an AC power outlet. Charging will begin automatically.

4. When a momentary press of the status button lights all 4 LEDs the powerstation hub battery is fully charged.

### USB-C Charging

You can also recharge the powerstation hub battery via its USB-C input/output port. This allows you to recharge the hub battery while the hub is wirelessly charging a Qi-enabled device (see *Priority+ Charging*, on pages 11 & 12).


Use the cable supplied with your smartphone or other device to connect the battery's USB-C input/output port to a power source with a USB output, such as the wall adapter included with your smartphone or other device.

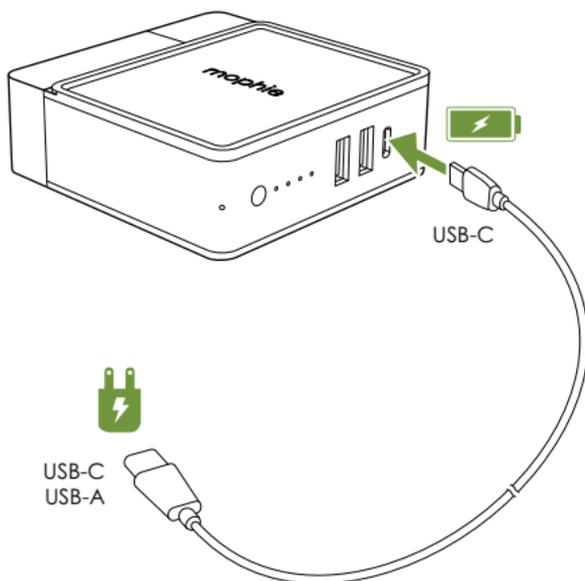


## Charging Your Devices

### Wireless Charging

1. (International version only): If you have attached an AC adapter that prevents the powerstation hub from lying flat, replace the adapter with the supplied Travel Cap.
2. Place your Qi-enabled device on the powerstation hub's wireless charging surface and press the status button for 3 seconds.
3. Wireless charging will begin when the device is properly aligned on the powerstation hub as shown.

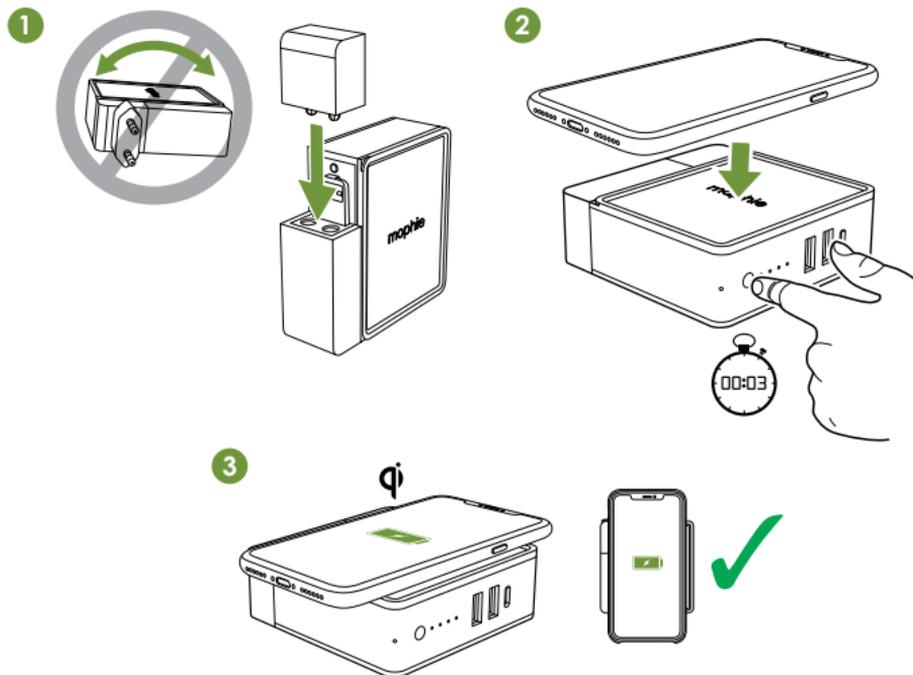

The powerstation hub battery has an LED (shown in the illustration below) that indicates its wireless charging status.

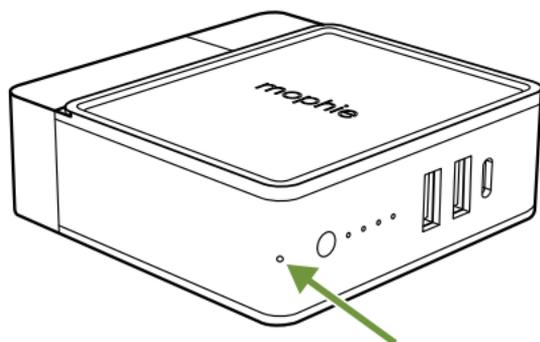

**LED illuminated continuously:**

- The Qi-enabled device is properly charging.

**LED flashing continuously:**


- A metallic foreign object (keys, etc.) has been detected on the powerstation hub's charging surface. Remove the foreign object.

**LED not illuminated:**


- Wireless charging has not been activated. Press the status button for 3 seconds to activate wireless charging.

## Wired Charging

**BEFORE YOU BEGIN:** Your powerstation hub battery can charge up to four devices at the same time (including wireless). When charging a single device, each output can supply the power shown in the illustration below. When charging 2 or more devices at the same time, the powerstation hub battery can supply a total of up to 15W.

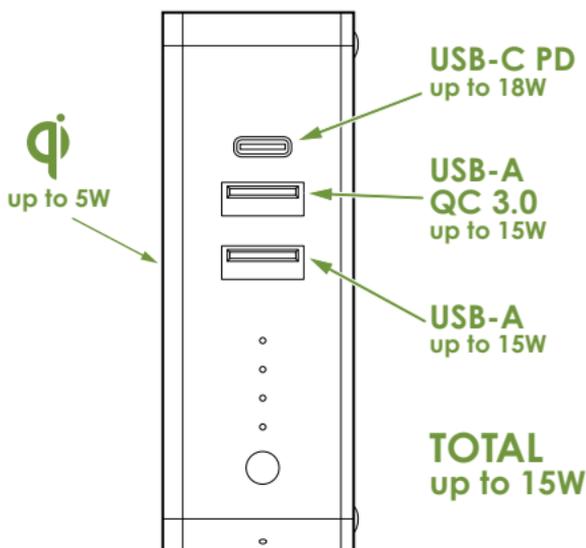


Connect the cable that came with your device to one of the powerstation hub's ports and to your device. You can charge up to 3 wired devices plus a wireless device all at the same time. Press the status button for 3 seconds to begin charging.

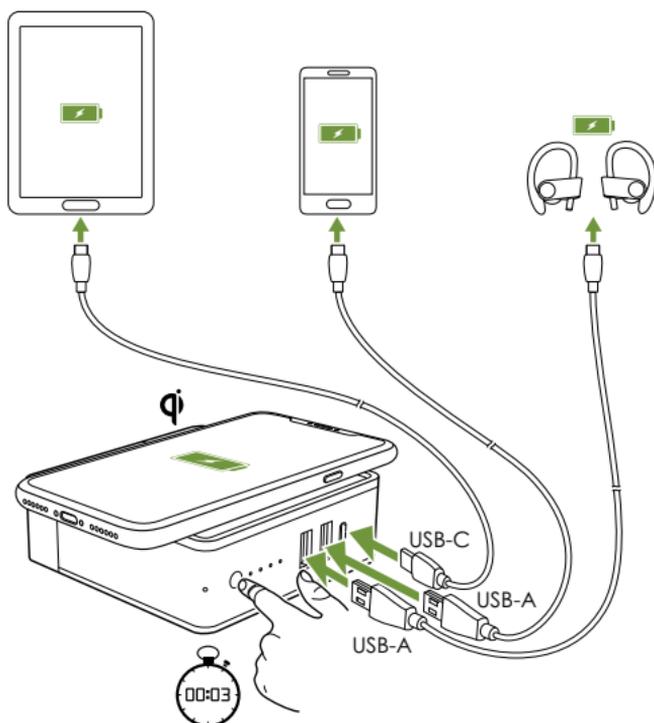


## Priority+ Charging

When you're recharging your powerstation hub battery, Priority+ charging provides power to connected devices first before the hub battery starts to recharge. Priority+ charging is available when recharging the powerstation hub battery via AC and via its USB-C input/output port.

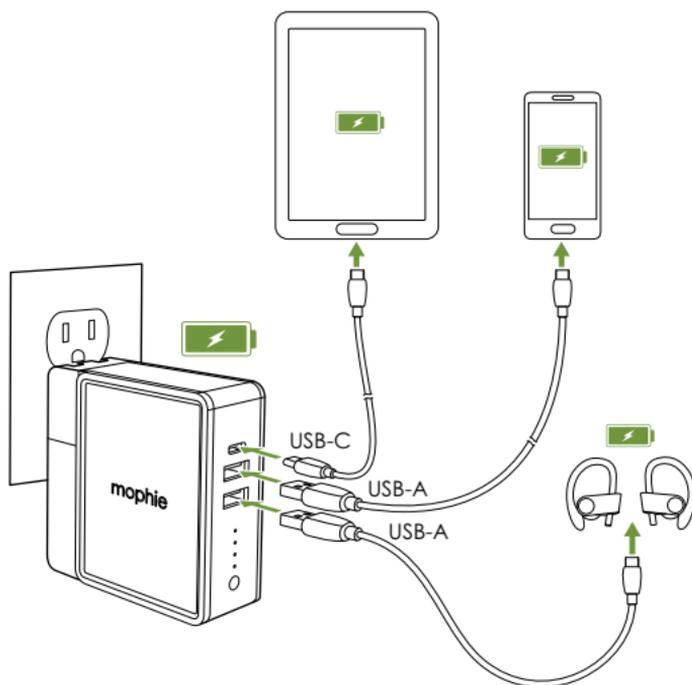


Note: When Priority+ charging via AC you do not have to press the status button for 3 seconds to initiate charging.

## Priority+ Charging cont.

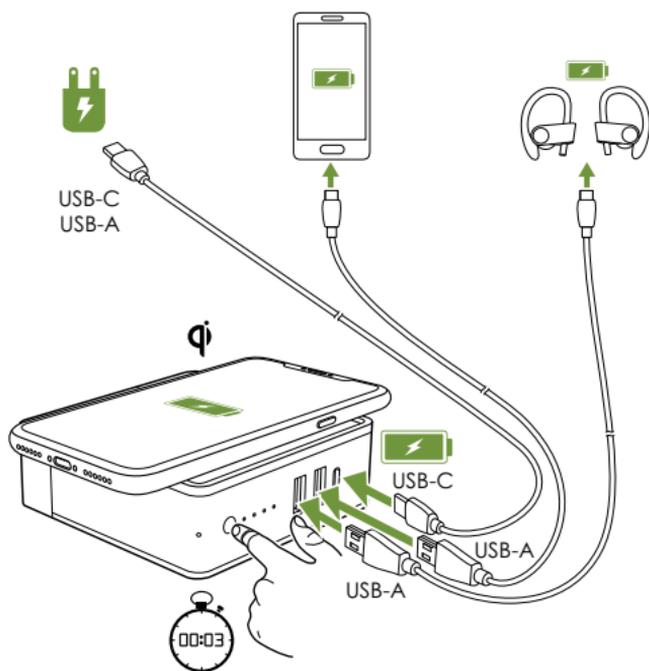

## Checking Your Battery's Charging Status

Momentarily press the status button on your powerstation hub battery and the status LEDs will indicate its charge level. Four LEDs means that the battery is fully charged, while one LED means that it's almost empty. Know before you go!

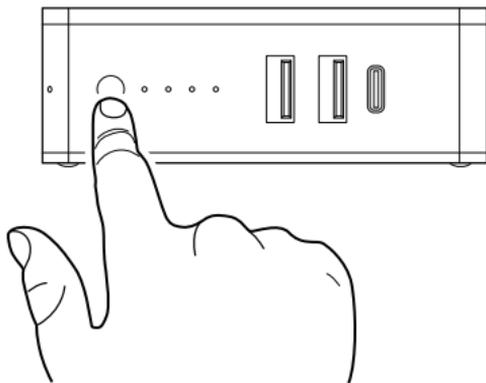

## **Taking Care Of Your powerstation hub Battery**

- Keep your powerstation hub dry and away from moisture and corrosive materials.
- Do not clean your powerstation hub with harsh chemicals, soaps or detergents. Just wipe the case with a soft, water-dampened cloth.
- Make sure the powerstation hub's charging ports do not become contaminated with lint or other debris. Use a canned-air type of product periodically to ensure that the port openings are clear.
- Recharge your powerstation hub battery once every three months when not in use. If you plan on putting it away, fully charge it first (so that pressing the status button lights all four charge status LEDs).

## **Warranty**

At mophie, we are dedicated to making the best quality products. To back this up, this product is warranted for 2 years. For full details regarding warranty terms and exclusions, please visit: [mophie.com/warranty](http://mophie.com/warranty). This warranty does not affect any statutory rights that you may be entitled to. Keep a copy of your purchase receipt as proof of purchase. Be sure to register your product at [mophie.com](http://mophie.com).

## **Exclusions & Limitations**

Except for the limited warranty expressly set forth or to the extent restricted or prohibited by applicable law, mophie expressly disclaims any and all other warranties express or implied, including any warranty of quality, merchantability, or fitness for a particular purpose, and you specifically agree that mophie shall not be liable for any special, incidental, indirect, punitive, or consequential damages of any type on any mophie product. In addition to and without limiting the generality of the foregoing disclaimers, the limited warranty does not, under any circumstances, cover the replacement or cost of any electronic device or personal property inside or outside of the mophie product.

You may have additional warranty rights depending on your country, state, or province. Further, some countries, states, and provinces do not allow the exclusion or limitation of incidental or consequential damages or exclusions or limitations on the duration of implied warranties, so the above may not apply to you. If any provision of the warranty is found unlawful, void, or unenforceable, that provision shall be deemed severable and shall not affect any remaining provision.

## **Customer Service**

Telephone: 1-888-8mophie (1-888-866-7443)

International: +1 (269) 743-1340

Web: [www.mophie.com/cs](http://www.mophie.com/cs)

## **IMPORTANT SAFETY INSTRUCTIONS**

### **Warning**

Read all instructions and warnings prior to using this product. Improper use of this product may result in product damage, excess heat, toxic fumes, fire, or explosion, for which damages you ("Purchaser"), and not mophie llc ("Manufacturer") are responsible.

- Before using your powerstation hub battery for the first time, fully charge it (so that pressing the charge status button lights all 4 status LEDs).
- Do not store device in high-temperature environment, including heat caused by intense sunlight or other forms of heat. Do not place device in fire or other excessively hot environments. Exposure to fire or temperature above 212°F (100°C) may cause explosion.
- This product should be operated only in open-air conditions. It should not be operated in an enclosed, unventilated space such as a carrying bag, pocket, purse or bedding. Failure to follow these instructions may damage the product by overheating.

- Be cautious of drops, bumps, abrasions, or other impacts to this product. If there is any damage to the product such as dents, punctures, tears, deformities, or corrosion due to any cause, discontinue use. Contact Manufacturer or dispose of it in an appropriate manner at your local battery-recycling center.
- Do not expose the portable battery to rain or snow.
- Do not use the portable battery in excess of its output rating. Overloading outputs above rating may result in a risk of fire or injury to persons.
- Do not disassemble this product or attempt to re-purpose or modify it in any manner.
- Do not attempt to replace any part of this device.
- For questions or instructions for the various ways to charge this device, refer to the illustrations in this quick-start guide.
- Use of a power supply or charger not recommended by mophie may result in a risk of fire or injury to persons.
- If this device is accessible to or may be used by a minor, purchasing adult agrees to be solely responsible for providing supervision, instruction, and warnings. Purchaser agrees to defend, indemnify, and hold Manufacturer harmless for any claims or damages arising from unintended use or misuse by a minor.

- All products have gone through a thorough quality assurance inspection. If you find that your device is excessively hot, is emitting odor, is deformed, abraded, cut, or is experiencing or demonstrating an abnormal phenomenon, immediately stop all product use and contact Manufacturer.
- Never dispose of batteries in the garbage. Disposal of batteries in the garbage is unlawful under state and federal environmental laws and regulations. Always take used batteries to your local battery-recycling center.
- Switch off the portable battery when not in use. The portable battery will automatically switch off when disconnected from a device.
- To comply with FCC RF exposure compliance requirements, the wireless charger must be used with a separation distance of at least 20 cm from all persons.

## **SAVE THESE INSTRUCTIONS**

### **Legal**

This product is meant for use only in conjunction with the appropriate device. Please consult your device packaging to determine whether this product is compatible with your particular device. Manufacturer is not responsible for any damages to any device incurred through the use of this product.

Manufacturer shall not in any way be liable to you or to any third party for any damages you or any third party may suffer as a result of use, intended or unintended, or misuse of this product in conjunction with any device or accessory other than the appropriate device for which this product is designed. Manufacturer will not be responsible for any damages you or any third party may suffer as a result of misuse of this product as outlined above. Purchaser agrees to defend, indemnify, and hold Manufacturer harmless for any claims or damages arising from unintended use or misuse, including use with an unintended device.

mophie, powerstation, Priority+, Stay Powerful, mophie loves you, the five-circles design, and the mophie logo are trademarks of mophie inc. Qi and the Qi symbol are trademarks of the Wireless Power Consortium. USB-C is a trademark of USB Implementers Forum. All rights reserved. Patents: [mophie.com/patents](http://mophie.com/patents).

This device complies with part 15 of the FCC Rules and RSS-Gen of IC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced technician for help.

**CAUTION:** To comply with the limits of the Class B digital device, pursuant to Part 15 of the FCC Rules, this device must be used with certified peripherals

and shielded cables. All peripherals must be shielded and grounded. Operation with non-certified peripherals or non-shielded cables may result in interference to radio or reception.

MODIFICATION: Any changes or modifications of this device could void the warranty.

THIS DEVICE CONFORMS TO UL STD 60950-1.  
CERTIFIED TO CSA STD C22.2 NO. 60950-1.  
CONFORMS TO UL SUBJECT 2056.

#### STATEMENT OF COMPLIANCE

Hereby, mophie declares that the radio equipment wireless charging base is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: [http://www.mophie.com/cert\\_red](http://www.mophie.com/cert_red).

#### RF SPECIFICATIONS:

RF Frequency Range: 110 kHz – 205 kHz

RF Power: 59.93 dB $\mu$ V

RF Field Strength: 59.62 dB $\mu$ V/m



#### WEEE DECLARATION

All of our products are marked with the WEEE  symbol; this indicates that this product must NOT be disposed of with other waste. Instead it is the user's responsibility to dispose of their waste

electrical and electronic equipment by handing it over to an approved re-processor, or by returning it to mophie inc. for reprocessing. For more information about where you can send your waste equipment for recycling, please contact mophie inc. or one of your local distributors.

 STAY POWERFUL™